

## **Electronic Sensor Based System used for identifying Impurity level in Liquids with Infrared Camera**

Smita A. Nagtode<sup>1</sup>, Dr. N.K. Choudhari<sup>2</sup>

<sup>1</sup> (Department of Electronics & Telecommunication, DMIETR, Sawangi(M)/RTM Nagpur University, India)

<sup>2</sup> (Professor and Principal, SBCCOE, Nagpur/RTM Nagpur University, Nagpur, India)

**ABSTRACT** : The concept of electronic tongues is more recent, and much less research has been undertaken on the development of liquid sensors and classification algorithms. By combining sensor systems e.g. Electronic noses and tongues together with a enhanced image processing techniques, the classification accuracy can be increased. In the proposed research work, it is planned to develop an electronic system that can be used for analysing liquid. This paper is based on new enhancement technique for infrared images which integrates the benefits of additive wavelet transformation and homomorphic image processing. The main motive behind this technique is to decompose the images into subbands in an additive fashion and the principle adopted to implement the same is using additive wavelet transform which produces the image as an addition of subbands of the same resolution.. Each subbands is subjected to homomorphic processing and it is learned that when images are subjected to homomorphic processing in the log domain, the images are transformed into illumination and reflectance components. When the reflectance components are enhanced it reinforces the details in the image so here this process is applied to each subband to enhance the details of image in each subband. In the final step these homomorphic enhanced subbands are subjected to an inverse additive wavelet transform to get an infrared image with better visual details.

**Keywords**— Homomorphic processing, illumination component, reflectance component, subband, Wavelet transform,.

### **I INTRODUCTION**

Electronic Tongue and Electronic nose system provides more services in various fields such as environmental monitoring, food science, and point of care business. The concept of electronic tongues is more recent, and much less research has been undertaken on the development of liquid sensors and classification algorithms. A sample of water or milk has too high concentration of bacteria so to analyze bacterial growth is an important task since the the bacteria can cause diseases and make the liquid unusable. But the accurate measurement of the process is time consuming.

The water may contain a broad variety spectrum of inorganic as well as organic compounds, germs etc. The measuring techniques to be used has to be robust, sensitive and must be able to detect small changes in the measuring media. The adaptation of fresh water quality to the test of human is one of the challenging questions for modern society. Virtual sensor system, tests the quality of the drinking water. The research is going with the direction to use this type of sensor system to measure the quality of liquid.

For example, in [1] a four electrode conductivity probe is used and in [2] thick film based sensors are used for determining the quality of water. In [3] a lipid membranes designed sensor are used to detect pollutants in water and in [4] an optical fiber sensor system is used to detect particle concentrations in water. Multi sensor system is used as water quality instrument [5, 6] in few applications. Many available modeling approaches are able to simulate water quality using 3D mathematical model [7], artificial neural networks [8] and fuzzy probability [9]. The concept of electronic tongue [10,11] has been developed to attract the needs of on-line monitoring of aqueous samples. Principal Component Analysis(PCA) is a mathematical transform, which is used to explain variance in exponential samples. After collecting the samples the appropriate tests were conducted using the sensor system. After PCA analysis it is examined that there exists a clear distinction of the resulting cluster from the raw water and the purified water[12], such result would confirm the chemical change that occur in raw water.

By combining sensor systems e.g. Electronic noses and tongues together with a enhanced image processing techniques, the classification accuracy can be increased. In the proposed research work, it is planned to develop an electronic system that can be used for analyzing liquids like milk, oil, water, juices, etc. The system hardware and software will be designed and developed and efforts will be taken to analyse liquid. Research work involves use of Image processing techniques, developments of new algorithms, continuous monitoring of the liquids under test, and evaluation of properties of liquid and hence quality of liquid.

The following will be the steps under taken for the research work,

- Detailed study of the concept, application and implementation of sensor networks.

- To design and develop an electronic sensor based system that can extract the information about the properties of the liquid.
  - Identify and analyze the effect using sensor based system, due to the liquid or any other ingredients present in liquid.
  - PC interface will be developed for online testing and monitoring.
- Evaluation results will be made available on display, displaying the quality of liquid under test.

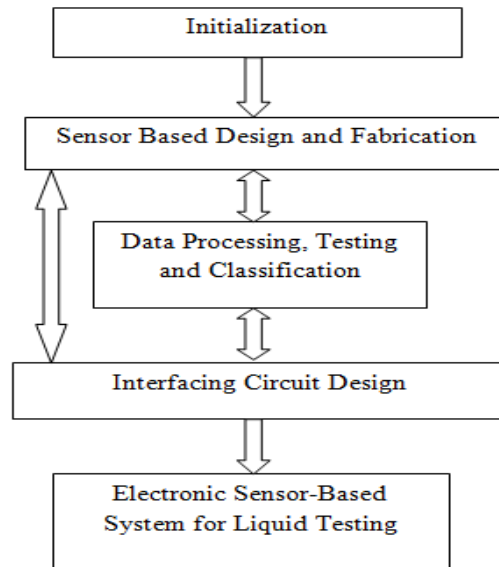


Figure 1: System representation.

Image enhancement has become a very popular field in image processing . The main aim of Enhancement is to improve the visual quality of image and this is achieved by reinforcing edges and smoothing the flat areas. Several researches have adopted various techniques in past such as simple filtering , adaptive filtering , wavelet de-noising , homomorphic enhancement etc.,[13-20] and all these techniques concentrate on reinforcing the details of the images to be enhanced.

Apart from all these techniques mentioned above , a new technique that is Infrared image processing has emerged for the evolution of night vision cameras. This technique has various advantages such as this technique has applications in thermal medical imaging[13-15,17]. With the evolution of night vision cameras , more researches are being performed in infrared image enhancement for information extraction from these images. Due to the absence of appropriate amount of light required for imaging , these images have a special nature of large black areas and small details . Hence , the main objective is to reinforce the details to get as much details as possible.

The enhancement of infrared images is slightly different from traditional image enhancement because this infrared image have large black areas and small details. So, our proposed methodology aims at separating the details in different subbands and processing each subband separately. It is found that additive wavelet transform is a very powerful tool in image decomposition and the details can be separated into the higher frequency subbands , if the images is decomposed using the additive wavelet transform.

In addition to all these we also use the homomorphic enhancement algorithm for transforming these details to illumination and reflectance components and then the reflectance components are amplified showing the details clearly. In the final step , to get an enhanced infrared image with much more detail , a wavelet reconstruction process is performed.

## II ADDITIVE WAVELET TRANSFORM

The main role of additive transform [21,24] is that it decomposes an image into the subbands using the “a’ trous” filtering approach in several consecutive stages. The low pass filter is used in this process and has the following mask for all stages:

$$H = 1/256 \begin{pmatrix} 1 & 4 & 6 & 4 & 1 \\ 4 & 16 & 24 & 16 & 4 \\ 6 & 24 & 36 & 24 & 6 \\ 4 & 16 & 24 & 16 & 4 \\ 1 & 4 & 6 & 4 & 1 \end{pmatrix} \dots\dots (1)$$

Each difference between filter outputs of two consecutive stages is a subband of the original image. We can use these subbands for further processing using homomorphic enhancement.

### III. HOMOMORPHIC IMAGE ENHANCEMENT

An Image can be represented by the following equation which is a product of a tow component :

$$f(n1, n2) = i(n1, n2) r(n1, n2) \dots\dots\dots (2)$$

where the obtained image pixel is given by  $f(n1, n2)$  and  $i(n1, n2)$  is the light illumination incident on the object to be imaged and  $r(n1, n2)$  is the reflectance of that object. It is known that light falling on all objects is approximately the same therefore due to this the illumination is approximately constant and the only change between the object images is in the reflectance component.

The above mentioned equation 2 can be changed to addition process from multiplication process by applying logarithmic process to equation 2 and the new equation form by applying the same is as follows:

$$\log(f(n1, n2)) = \log(i(n1, n2)) + \log(r(n1, n2)) \dots\dots\dots (3)$$

As shown in the above equation the first term has smaller variations but the second term has large variations as it corresponds to the reflectivity of the object to be imaged.

We can reinforce the image details by attenuating the first term and reinforcing the second term in equation (3).

### IV. PROPOSED APPROACH

In this approach , firstly the image is decomposed into subbands using the additive wavelet transform and then each subband is processed separately using the homomorphic approach to reinforce its details and by this way we merge the benefits of the above mentioned techniques. In the experimental setup we connect twenty infrared Light emitting diode (IR LED's) across camera and when this IR LED's is ON human eye cannot detect this but it can be easily captured by Camera.

The steps of the proposed approach can be summarized as follows:

1. In the first step Using additive wavelet transform and the low pass mask of equation (1) , the infrared image is decomposed into four subbands  $p3, w1, w2, w3$ .
2. In the second step, a logarithmic operation in each subband is applied to get the illumination and reflectance component of the subbands  $w1, w2$  and  $w3$  as they contain the details.
3. In the third step attenuation operation is performed on illumination component and reinforcement operation is performed on reflectance component in each subband.
4. Using addition and exponentiation processes each subband is reconstructed from its illumination and reflectance.
5. Perform an inverse additive wavelet transform on the obtained subbands by adding  $p3, w1, w2$  and  $w3$  after the homomorphic processing to get the enhanced image.

## V EXPERIMENTAL RESULTS

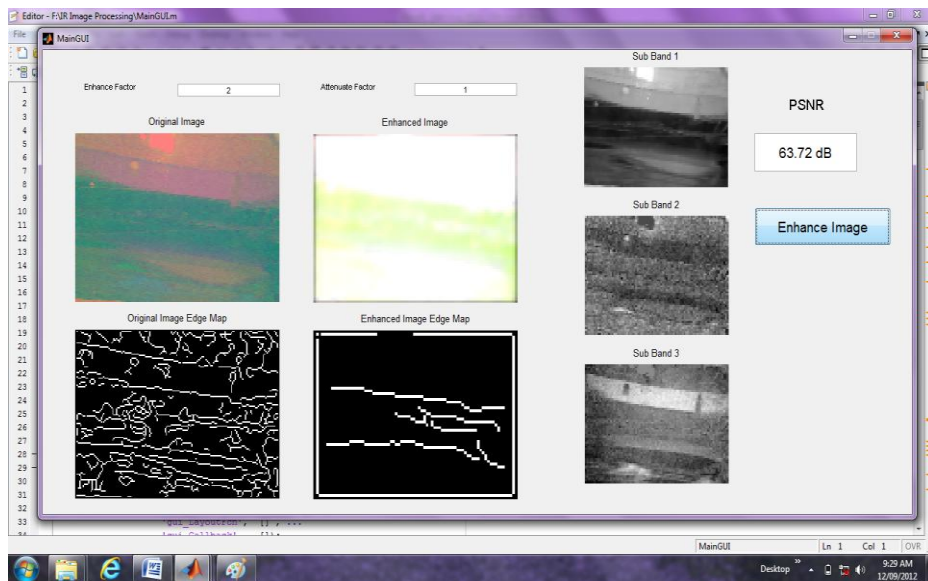


Figure 2: Results of first experiment (Liquid-Water)

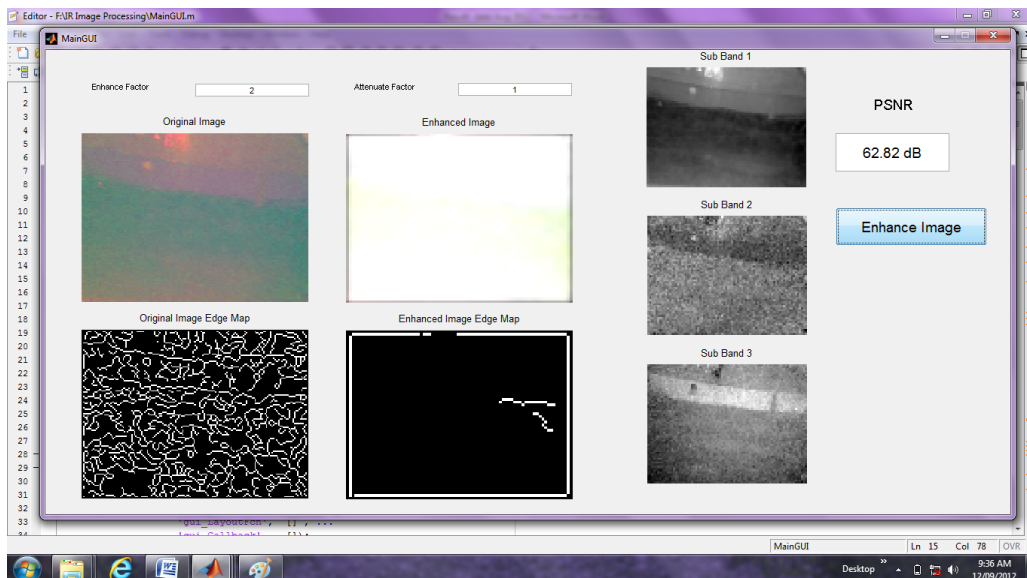


Figure 3: Results of Second experiment (Liquid- Water with small impurity)

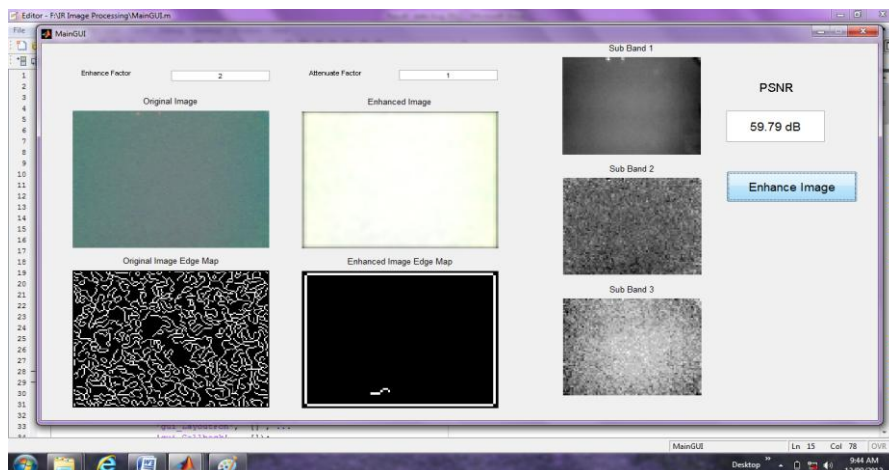


Figure 4: Results of Third experiment (Liquid- Water with more impurity)

Three experiments are performed to test the performance of the proposed system. In first experiment are shown in figure.5, which gives the original infrared image of liquid (water) and the enhanced infrared image using the algorithm as well as its edge map. It is observed that the proposed sensor system with enhancement algorithm has enhanced the visual quality of liquid and its edge map.

In second and third experiments are performed to test the performance of the proposed system which is shown in figure 8, which again give the original infrared images and enhanced infrared images for liquid as water and water with impurity.

It is clear that the peak signal to noise ratio (PSNR) of impure liquid is always less as compared to pure liquid.

## VI. CONCLUSION

This paper draws our attention to a new approach for infrared image enhancement. This approach clubs the additive wavelet transform and the homomorphic enhancement features. Each infrared image subbands are subjected to homomorphic processing separately. To reconstruct an enhanced image these subbands are merged again. The results obtained using this algorithm reveal its ability to enhance infrared images.

## REFERENCES

- [1]. Wang-Hongwei and Zhang -Xunshi, "Analysis of a new type fourelectrode conductivity prob", Chinese Journal of Scientific Instrument., Vol. 19 no 4, p. 399-402.
- [2]. J.K. Atkinosn, A. W. J. Cranny, W.V. Glasspool, and J.A. Mthell, " An investigation of the performance charactrestics and operational life-times of multi-eleement thick sensor array used in the determination of water quality parameters:. Sensor & Actuators B, vl. B54, no 3 March 1999,p 215-231,
- [3]. A. Taniuguch, Y. Naito, Madea, Y Sato and H. Ikezaki, " Development of a monitoring system for water quality using a taste sensor", Sensors and Materials , vol 11 no7, 1999, p 437-446.
- [4]. F. H. Zhang, E Lewis and P.J. Scully. " An Optical fiber sensor for particle concentration measurement in water systems based on interfiber light coupling between polymer optical fibers", Transactions of the Institute of Measurement and Control, vol 22 no5, 2000,p 413-430.
- [5]. A. Hayasaki and a. Kumada. " Meiden Review ( International edition)" no 2, 2000, p 16-19.
- [6]. M. Fujiu, T. Watanabe, H. Shimoto, and H. Tsugura, "High Function water quality measuring instruments for waterworks", Meiden Review International editin) no 3, 1998, p 18-20
- [7]. A.J.R. Silva, J.P. Delfino, J.C. Leitao, P. Pino and R.J.J. Neves," Operational Models-a tool to improve coastal management", Eight International conference on Hydraulic Enigineering Software HYDROSOFT 2000, WIT PRESS, Southampton, UK 2000 P. 470
- [8]. G. Waterworth , "Modelling and simulation of water quality control", 14 European Simulation Multiconference, ESM'2000, Belgium, 2000 .
- [9]. K. Sasikumar and P.P. Mujumdar, Application of fuzzy probability in water quality management of a river system" Internationla Journal of Systems Science, vol 31 no 5, 2000, p575-591.
- [10]. F : Winquist, P: Wide, and I : Lundstrom . "An electronic tongue based on voltammtry ." Analytica Chimica Acts 357". pp 21-31, 1997.
- [11]. Y : Sasaki, Y : Kanai, H: Ushida and T : Katsube, " Higly Sensitive taste sensor with a new diferential LAPS method", Sensors and Actuators B 25 (1995) 819-892.
- [12]. Malin Lindquist and Peter Wide," Virtual Water Quality Tests with an electronic Tongue", 2001 IEEE.
- [13]. "A Emonstration of Wireless sensing for long term monitoring of water quality", Fiona Regan, Antoin Lawlor, & John Wallace ,2009 IEEE.
- [14]. Qi,H.and J. F. Head, "Asymmetry analysis using automatic segmentation and classification for breast cancer detection in thermograms," Proceedings of the Second Joint EMBS/BMES Conference, USA, 2002.
- [15]. Kuruganti, P. T. and H. Qi, "Asymmetry analysis in breast cancer detection using thermal infrared images," Proceedings of the Second Joint EMBS/BMES Conference, USA, 2002.
- [16]. Scales, N., C. Herry, and M. Frize, "Automated image segmentation for breast analysis using infrared images," Proceedings of the 26th Annual International Conference of the IEEE EMBS, San Francisco, CA, USA, 2004.
- [17]. Zhang, C. J., F. Yang, X. D.Wang, and H. R. Zhang, "An efficient non-linear algorithm for contrast enhancement of infrared image," Proceedings of the Fourth International Conference on Machine Learning and Cybernetics, Guangzhou, 2005.
- [18]. Qil, H., W. E. Snyder, J. F. Head, and R. L. Elliott, "Detecting breast cancer from infrared images by asymmetry analysis," Proceedings of the 22nd Annual EMBS International Conference, USA, 2000.
- [19]. Andreone, L., P. C. Antonello, M. Bertozzi, A. Broggi, A. Fascioli, and D. Ranzato, "Vehicle detection and localization in infrared images," The IEEE 5th International Conference on Intelligent Transportation Systems, Singapore, 2002.
- [20]. Zhang, C., X. Wang, H. Zhang, G. Lv, and H. Wei, "A reducing multi-noise contrast enhancement algorithm for infrared image," Proceedings of the First International Conference on Innovative Computing, Information and Control (ICICIC'06), 2006.
- [22]. Nunez, J., X. Otazu, O. Fors, A. Prades, V. Pala, and R. Arbiol, "Multiresolution-based image fusion with additive wavelet decomposition," IEEE Trans. Geosci. Remote Sensing, Vol. 37, No. 3, 1204-1211, May 1999.
- [23]. Lim, J. S., Two-Dimensional Signal and Image Processing, Prentice Hall Inc., 1990.
- [24]. Linn Robertson and Peter Wide, " Analysing Bacteriological Growth using Wavelet Transform", 2004 IEEE.
- [25]. "Homomorphic Enhancement of Infrared Images Using the Additive Wavelet Transform", by H.I.Ashiba, K, H. Awadallah, S. M. Halfawy and F. E. Abd El-Samie, Progress in Electromagnetics Research C, Vol.1, 123-130,2008.