

Shear Strength Improvement Welded Joints in Vibratory Lap

M Ramakotaiah¹, Prabhu Prasad Mishra²

¹(Department of Mechanical Engineering, Gandhi Engineering College, India)

²(Department of Mechanical Engineering, Gandhi Institute For Technology, India)

Abstract: Manufacturing Assembling forms unavoidably prompt a condition of lingering worry into materials and items. This can present potential issues, regarding dimensional dependability, Structural trustworthiness and diminished weariness life. The traditional method to alleviate the leftover anxieties is post-weld heat treatment, which is a successful procedure, however it experiences a few detriments: the expense of treatment as far as gear and vitality is high. Subsequently another methodology is expected to conquer the disadvantages experienced by the ordinary pressure easing procedures. As an expansion to the current strategies for better quality feasibility vibratory welding method is presented. The current test is planned to dissect the impact shear weight on the lap welded mellow steel plates of IS 2062 evaluation B, which are welded during vibration with varieties of current that is at various amplitudes and increasing speeds. What's more, it is recognized that the shear quality is expanding while the welding procedure is finished by offering vibrations to the work piece.

Key Word: lap welded, vibratory welding, IS 2062

I. Introduction

Welding is widely used in automotive industries to assemble various products. It is well known that the welding process relies on an intensely localized heat input, which tends to generate undesired residual stresses and deformations in welded structures, especially in the case of thin plates. Therefore, estimating the magnitude of welding deformations and characterizing the effects of the welding conditions are deemed necessary. Welding is widely used for construction of many structures. There exists residual stress near the bead because of locally given heat. Tensile residual stress on the surface degrades fatigue strength. In order to eliminate the residual stresses which are formed during welding, some of the olden techniques like shot peening and heat treatment are used. However, those methods need special tools and are time consuming. So a new method is proposed in which vibrational load is used during welding operation. During welding, the pieces to be joined (the work pieces) are melted at the joining interface and usually a filler material is added to form a pool of molten material (the weld pool) that solidifies to become a strong joint. During the welding process the residual stresses are more and due to this the weld strength is reduced and some defects may be observed. So to minimize the residual stresses vibratory welding techniques have been introduced. Lu et al. [1] investigated the application of vibratory weld conditioning (VWC) on full welded valve. They found that the vibration applied during welding generally reduces the residual deformation and stress. Jijin et al. [2] compared VWC and normal submerged arc welding of multi pass girth-butt welded pipes. They found that VWC can reduce the residual hoop stresses at the outer surface and the radial distortion significantly. Munsi et al. [3] performed investigations on the effect of amplitude of vibration, time of vibration, and frequency of vibration. The work finds an optimum applied stress that will maximize the reduction in both longitudinal and transverse residual stresses. Rao et al. [4-40] found that dynamic solidification technique during welding has been proposed to improve the mechanical properties of butt welded joints. It was presumed that butt welded joints arranged under vibratory conditions had high hardness with no loss of its ductility. Authors' utilized the vibratory setup to affect the mechanical vibrations to the weld pool amid welding. Because of vibratory welding process, change of mechanical properties has been observed. It was inferred that the refined microstructure component was in charge of the change of impact strength, tensile strength, flexural strength and hardness of butt welded joints of mild steel plates. Authors' observed that post weld vibratory treatment will not influence the crystal structure, but the increase in all properties is related to the crystal structure only. Finally, General regression neural network technique (GRNN) based tool has been developed for estimating tensile strength, impact strength, flexural strength and hardness for given input vibratory parameters. Based on the past literature, this paper presents the effect of vibrations on shear strength of lap welded joints.

II. Methodology

Material

The chosen material for this experiment was Mild Steel 2062-B grade. It was selected in keeping view of its salient features like availability, cost effective and wide range of applications.

Table 1 Mechanical properties of the material

S.No.	Grade	Ultimate tensile strength (MPa)	Yield Strength (MPa)	% Elongation
1.	A	408	210	21
2.	B	412	210	23
3.	C	410	210	22

The specifications of the specimen are Plates of mild steel are taken in two different dimensions that is 300mm X 100mm X 6mm and another one set is of 350mm X 100mm X 6mm dimensions Processes of material outline preparation:

- Specimens are cut using gas cutter to required dimensions and then edges are finished with hand grinder.
- Holes are marked on every set of plates with an overall diameter of 12mm. Then both plates were lap jointed and clamped on to the vibratory table.

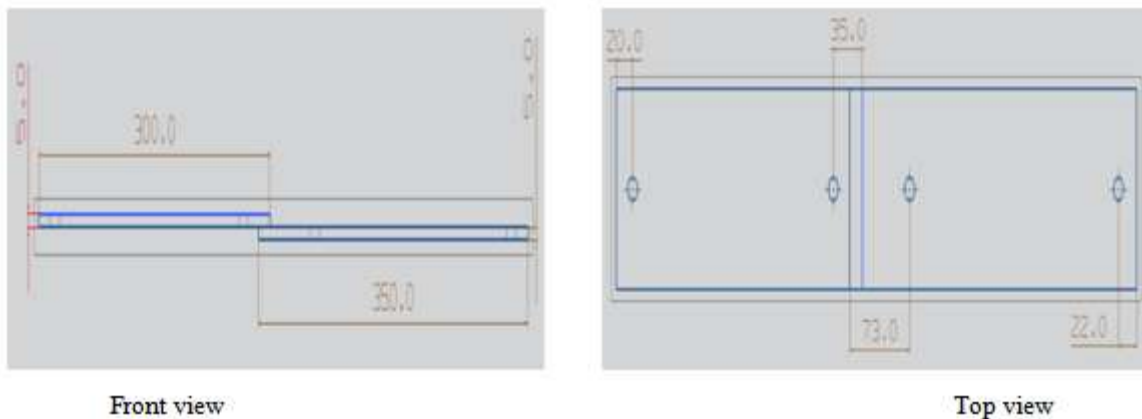


Figure 1 Specimen set-up

The vibratory welding experiment was performed with an arc generated welding machine to weld MS plates of IS 2062 grade-B, The mild steel IS 2062 grade-B is high strength micro alloyed steels having a combination of desirable properties not attainable in conventional mild steel. These steels have higher yield strength, higher notch toughness, good fatigue properties, excellent weld ability and good formability.

Shear Stress

It is the external force acting on an object or surface parallel to the slope or plane in which it lies; the stress tending to produce shear. In this test material to be tested is inserted in between the jacks of a shear testing machine called Universal Testing Machine (UTM), and then load is applied gradually without any sudden rise in load. This machine has multiple testing features along with Shear test.

Specimen Preparation

The pair of plates which were lap welded was of 635mm each in length wise and of 100mm width before subjected to shear test. There was a problem raised with the plates to hold them in the UTM by face plates in terms of gripping area laterally, i.e. the plates can grip specimens of width less than 60mm, whereas the specimen is of 100 mm width. In order to solve this problem the welded paired plates are cut length wise exactly in mid of the plates so as to reduce the width to 50 mm. Thus every pair was set in UTM, for testing.

Measuring and Marking

The lap welded mild steel specimens of 4 sets were taken for the shear test in Universal Testing Machine after the hardness was measured. Before subjecting to shear test each pair (three vibratory welded and one ordinary welded) was measured in length and breadth wise and a certain length was marked from weld

bead in both directions called ‘G auge Length’ which was 260mm. Gauge leength is the effective length between the gripping plates(excluding the portion of the specimen inside the gripping plates) which suffers the deformation while doing shearr test and as a result the gauge length is changed after shear, which is the measure of the strain. Similarly the thickness was also measured before and after the testing. After suitable gripping plates were found i.e. squ are plates; the specimens were set clamped within the gripping plates.

Shear Test

The machine used here for the shear test was ‘Hydraulically operated computerized UTM’ (model: TUE-C-1000) of measuring capacity 10 00KN max. and least count of 0.1KN. Out o f the various parameters the graph here is taken between ‘Stress and Strain’ since it is the standard curve to study the various material properties like elastic, yield, ultimate and breaking strengths.



Figure 2 Sample specimen between the holding plates of the UTM during shear test.

The generated graphs under different conditions are provided here with the mentioning of tensile, yield strengths and peak loads along with %change of elongation of the specimens. At 0 and 70 voltage the stress strain curve is shown in figure 3 and figure 4

III. Results And Discussion

The obtained values of the shear test are tabulated here below. From elastic point to breaking point the graph follows a certain path via yield and ultimate strength points. Here the computer generated individual Stress-Strain curves are given for each kind of specimen set separately i.e. three with vibration and one without vibration. These individual graphs also provide different strengths and percentage change in area and other parameters values numerically.

From the computer generated graphs the different values of the specimen i.e. tensile and yield strengths are tabulated below at a place for the sake of comparison of changes of the properties in the specimens from without to with vibratory welding and inner to that variation of range of vibration in correspondence with the changes in the voltages.

Table 2 Obtained Tensile and yield strengths of specimen at different voltage conditions

STRENGTH(N/mm ²)	0 VOLTS	70VOLTS	150VOLTS	230VOLTS
Yield Strength(N/mm ²)	166.4	203.3	238.9	258.5
Tensile strength(N/mm ²)	280	442	440	454

From the table 2 it can be compared and concluded that the yield and tensile strengths are increased from ordinary welded mild steel specimen, to vibratory welded and within vibratory from 70Voltage vibration to 230Voltage vibration. But a slight decrease of yield and tensile strengths are observed from ordinary welded to normal mild steel specimen (without welding). The above tabulated results are plotted in graphs shown in figure 7 below.

Yield Strength Graph

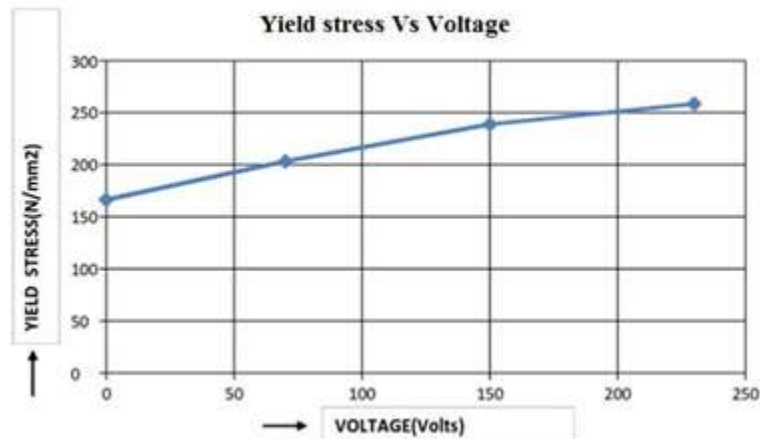


Figure 7 The variation of yield strength from 0-230 Voltage corresponding Vibrations.

The fig.7 depicts that the yield strength value of the specimen is increasing from 0volts corresponding vibratory welding to 230 volts corresponding vibratory welding. Hence it can be interpreted that the effect of vibration during welding on increasing the yield strength is positive in nature.

Tensile Strength Graph

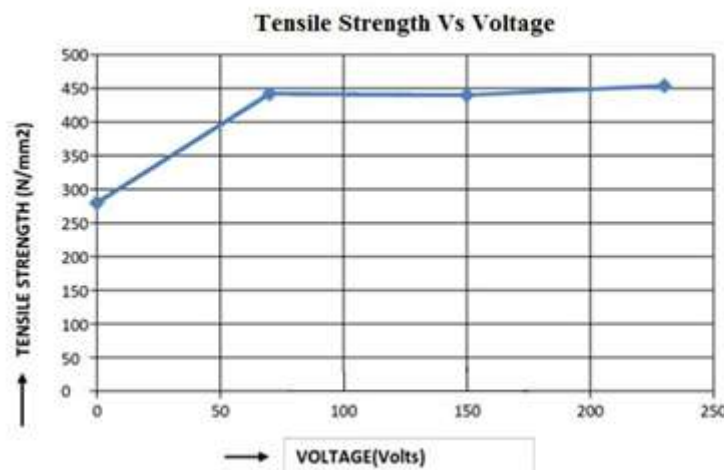


Figure 8 The variation of Tensile strength from 0-230 Voltage corresponding Vibrations.

The figure 8 depicts that the tensile strength value of the specimen is increasing from 0volts corresponding vibratory welding to 230 volts corresponding vibratory welding. Hence the same can be interpreted here for tensile strength as in the case of yield strength that the effect of vibration during welding on increasing the tensile strength is positive.

From the above graphs and tabular data it can be said that presence of vibration can significantly raise the tensile and shear strengths of the specimen. Higher the vibration voltages within the limits greater the improvement of strength.

IV. Conclusions

- The effect of various parameters such as voltage, current, frequency in altering the mechanical properties such as shear strength has been studied under vibratory welding process.
- In this work an efficient and standard methodology has been established to increase the shear strength when welding IS 2062 grade-B mild steel. The shear strength that is tensile and yield strengths are raised worth significantly from ordinary welded to vibratory welded lap jointed MS specimens.
- Even the same degree of rise of strength can be observed within the vibratory welded lap joint for an increase of intensity and magnitude of vibrations which is the result of increase in voltage, provided the increment is

within the range so that at higher voltage corresponding vibrations the welding will not become difficult at the same time the molten metal doesn't spill around.

•Since various mechanical properties like shear strengths are increased to noticing range, it can be concluded that vibratory welding is beneficial over other conventional methods alone to achieve a good improvement in properties with in less time and cost.

•Hence the proposed methodology facilitates the effective use of vibratory welding in order to increase the mechanical properties of the material in small scale industries where heat treatment can't be affordable.

References

- [1] Qinghua, Lu, Chen Ligong, and Ni Chunzhen, Effect of vibratory weld conditioning on welded valve properties, *Mechanics of Materials*, Vol. 40, Issue 7, 2008, pp. 565-574.
- [2] Xu, Jijin, Ligong Chen, and Chunzhen Ni, Effect of vibratory weld conditioning on the residual stresses and distortion in multipass girth-butt welded pipes, *International Journal of Pressure vessels and piping*, Vol. 84, Issue 5, 2007, pp. 298-303.
- [3] Munsif, A. S. M. Y., A. J. Waddell, and C. A. Walker, Vibratory stress relief—an investigation of the torsional stress effect in welded shafts, *The Journal of Strain Analysis for Engineering Design*, Vol. 36, Issue 5, 2001, pp. 453-464.
- [4] P.Govinda Rao, P.Srinivasa Rao and A.Gopala Krishna, "Mechanical Properties Improvement of Weldments Using Vibratory Welding System", *Proceedings of the Institution of Mechanical Engineers, Part B: Journal of Engineering Manufacture (JOEM)*, Vol. 229, issue 5, May 2015, pp. 776-784.
- [5] P.Govinda Rao, P.Srinivasa Rao and A.Gopala Krishna, "A Smart Prediction Tool for Estimating Impact Strength of Welded Joints Prepared by Vibratory Welding Process". *Proceedings of the Institution of Mechanical Engineers, Part E: Journal of Process Mechanical Engineering*. First published on 29th March 2015.
- [6] P.Govinda Rao, P.Srinivasa Rao and A.Gopala Krishna, "Evaluation of Bending Strength of the Vibratory Welded Joint Using Regression Technique", *International Journal of Offshore and Polar Engineering*, Vol. 25, issue 3, September 2015, pp. 227-230.
- [7] P.Govinda Rao, P.Srinivasa Rao and A.Gopala Krishna, "Flexural strength Improvement of Welded Joints prepared by Vibratory Welding Process", *International Journal of Manufacturing, Materials, and Mechanical Engineering (IJMME)*, Vol. 5, issue 4, pp.1-16, October-December 2015.
- [8] P.Govinda Rao, P.Srinivasa Rao and A.Gopala Krishna, "Impact strength Improvement of Butt Welded joints prepared by Vibratory Welding Process", *Journal of Manufacturing Technology Research (JMTR)*, Vol.6:3-4, pp. 143-151.
- [9] P.Govinda Rao, P.Srinivasa Rao and A.Gopala Krishna, "Review on residual stresses in welded joints prepared under the influence of mechanical vibrations", *Journal of Manufacturing Technology Research (JMTR)*, Vol.6:1-2, pp. 33-40.
- [10] P.Govinda Rao, P. Srinivasa Rao, A.Gopala Krishna, C.V.Sriram, "Improvement of Tensile strength of a Butt welded joints prepared by Vibratory welding process", *International Journal of Mechanical Engineering and Technology*, Vol 4, issue 2, July-Aug 2013, pp. 53-61.
- [11] P.Govinda Rao, CLVRSV Prasad, D.Sriramulu, V.Chittibabu, M.Vykunta Rao, "Determination of Residual Stresses of Welded Joints Prepared under the Influence of Mechanical Vibrations by Hole Drilling Method and compared by Finite Element Analysis", *International Journal of Mechanical Engineering and Technology*, Vol 4, issue 2, may-june 2013, pp. 542-553.
- [12] P.Govinda Rao, V. Jagadeesh, K. Santarao and V. Chittibabu, "Performance of Solar Power Refrigerator using different Materials: A Comparison, Accepted in *International Journal of Manufacturing, Materials, and Mechanical Engineering (IJMME)*", Vol. 7, Issue 1, pp. 52-66, January-March 2017.
- [13] P.Govinda Rao, P.Srinivasa Rao, A.Gopala Krishna, and Sarkar M.M.M, "Affect of vibratory welding process to improve the Mechanical properties of Butt welded Joint" *International Journal of modern Engineering Research (IJMER)*, Vol 2, Issue 4, July-Aug 2012 pp.2766-2770.
- [14] P.Govinda Rao, CLVRSV Prasad, S.V.Ramana and D.Sreeramulu "Development of GRNN Based Tool For Hardness Measurement of Homogeneous Welded Joint Under Vibratory Weld Condition", *International Journal of Advanced Research in Engineering and Technology*, Volume 4, Issue 4, May – June 2013, pp. 50-59.
- [15] J.Kalpana, P.Srinivasa Rao and P.Govinda Rao, "Influence of Amplitude on the Tensile Strength of Welded Joints fabricated under Vibratory Weld Conditioning", *Journal of Mechanical Engineering Research and Developments*, Vol. 39, issue 3, pp. 757-762. 2016.
- [16] J. Kalpana, P.Srinivasa Rao and P.Govinda Rao, "Effect of frequency on impact strength of dissimilar weldments produced with vibration", *International Journal of Chemical Sciences*, Vol. 14, Issue 3, pp. 1797-1804, 2016.
- [17] G.Ramakrishna, P.Srinivasa Rao and P.Govinda Rao, "Methods To Improve Mechanical Properties of Welded Joints: View Point", *International Journal of Mechanical Engineering and Technology*, Volume 7, Issue 6, 2016, pp. 309-314.
- [18] P.Lakshminarayana, P. Govinda Rao, "Finite Element Methodology of Residual stress in Butt welding of two similar specimens", *International Journal of Mechanical Engineering and Technology (IJMET)*, Volume 5, Issue 6, June (2014), pp. 55-63.
- [19] V. Chittibabu, K.Santa Rao and P.Govinda Rao, "Factors Affecting the Mechanical Properties of Compact Bone-Miniature Specimen Test Techniques: A Review", *Advances in Science and Technology-Research Journal*, Volume 10, No. 32, Dec. 2016, pp. 140-154.
- [20] MVS Babu and P.Govinda Rao, "Recent developments in the fabrication of metal matrix composites by stir casting route: A Review", Accepted in *International Journal of Chemical Sciences*.
- [21] CLVRSV Prasad, K. Santa Rao and P.Govinda Rao, "Thermoelectric Power Generation by recovering heat energy from the exhaust gases: A Green Technology approach", *International Journal of ChemTech Research*, Vol.9, Issue 05 pp.577-584, 2016, Sai Scientific Communications.
- [22] D.Venkata Rao, MVS Babu and P.Govinda Rao, "Experimental Investigation of Mechanical Behaviour of Tin alloy based Particulate Metal Matrix Composites", Vol. 14, Issue 3, pp.1730-1736, *International Journal of Chemical Sciences*.
- [23] K. Santarao, L V Suryam, P. Govinda Rao, "Analysis of epoxy composite rectangular plate with a circular hole: A Finite Element Approach", in *Journal of Chemical and Pharmaceutical Research*, Vol.8, Issue 7, pp.605-610.
- [24] Yegireddi Shireesha, Bade Venkata Suresh, P Govinda Rao, "Emissions Reduction using Catalyst Converter", *International Journal of ChemTech Research*, Vol.9, Issue 3, pp. 540-549, 2016.
- [25] K.Prasada Rao, K.Santarao and P.Govinda Rao, "Experimental Investigation on Performance and Emission Characteristics of a DI Diesel Engine Fuelled with Rice Bran Oil Methyl Ester and Methanol as an additive", *International Journal of ChemTech Research*, Vol.9, Issue 03 pp.258-266, 2016.

- [26] V.Chittibabu, K.Santarao, P.Govinda Rao and MVS Babu, "Experimental Studies on Tensile Properties of Various Steels Using Miniature Specimens", International journal of ChemTech Research, Vol.9, Issue 8, pp. 305-311, 2016.
- [27] J.Kalpana, S.V.Ramana, P.Govinda Rao, V.Chittibabu, K Santa Rao, "Implementation of Generalized Regression Neural Network to Establish a Relation between Vibration Parameters and Time of Vibration for Welded Joints", IOSR Journal of Mechanical and Civil Engineering Volume 6, Issue 4, May-Jun.2013, pp. 36-42.
- [28] G.Ramakrishna, Ch.Anil Kumar, P.Govinda Rao, V.Chittibabu and S.V.Ramana, Finite Element Analysis of Residual Stresses in Welded Joints Prepared Under Influence of Mechanical Vibrations", International Journal on Mechanical Engineering and Robotics (IJMER), ISSN (Print): 2321-5747, Volume-1, Issue-1, 2013, pp.85-89.
- [29] G.Ramakrishna, Ch.Anil Kumar, P.Govinda Rao and S.V. Ramana," A Finite Element Based Analysis of Residual Stresses of Welded Joint Through Mechanical Vibrations" International Journal of Mechanical and Production Engineering (IJMPE),ISSN:2315-4489,Volume 2,Issue-1, 2013,pp.72-77.
- [30] V. Chitti babu, L.V.sateesh and P. Govinda Rao, "Dynamic Analysis Of Piezoelectric Transducers Using Finite Element Method", International Journal of Engineering Research and Technology, Volume 2, Issue 5, May – 2013, pp.375-385.
- [31] V Chitti Babu, Bade Venkata Suresh, P. Govinda Rao, "Determination of Mechanical Properties of Different Materials Using Inverse Finite Element Procedure for the Miniature Specimen Test Simulation", IOSR journal of Mechanical and Civil Engineering, Volume 6, Issue 3 (May. – Jun. 2013), pp. 25-36.
- [32] B.Krishna Prafulla, V. Chitti Babu and P. Govinda Rao "CFD Analysis of Convergent- Divergent Supersonic Nozzle", International Journal of Computational Engineering Research, Volume 3, Issue 5, May 2013, pp.5-16.
- [33] Yegireddi shireesha,S.V.Ramana and P.Govinda Rao, "Modeling and static analysis of femur bone by using different implant materials", IOSR Journal of Mechanical and Civil Engineering, Volume 7, Issue 4 (Jul. – Aug. 2013), pp.82-91.
- [34] P.S.Rao, K.Mohan Krishna choudary, M.Vijay Sekahr babu, P.Govinda Rao and A.Surya Prakash, "Synthesis of Nano Titanium Dioxide powder using MWP (Microwave plasma) and its characterization", International Journal of modern Engineering research, Volume 2, Issue 3, May-June 2012, pp.1150-1156.
- [35] G.Ramakrishna, Ch. Anil Kumar, P.Govinda Rao and V Chitti Babu and S V Ramana," Finite Element Analysis Of Residual Stresses In Welded Joints Prepared Under The Influence Of Mechanical Vibrations", International Conference on Latest Trends in engineering and Technology (ICLTET) during 27th April 2013 at Tirupati.
- [36] P.Govinda Rao, P.Srinivasa Rao, A.Gopala Krishna and C V Sriram, " Some Improvements In Mechanical Properties Butt Welded Joints Of Steel Through Vibratory Welding Process", National Conference for Researchers on Latest innovations in Mechanical Engineering (Lime 2013) during 28th April 2013 at Andhra University, Visakhapatnam.
- [37] B. Venkata Suresh, Dr. V. Chitti Babu and P.Govinda Rao, "Inverse finite element Procedure for the determination of Mechanical properties of the different materials using miniature specimen simulation", National Conference for Researchers on Latest innovations in Mechanical Engineering (Lime 2013) during 28th April, 2013 at Andhra University, Visakhapatnam.
- [38] G.Ramakrishna, Ch. Anil Kumar, P.Govinda Rao and Dr. S.V Raman "A Finite Element Based Analysis of Residual Stresses of Welded Joint through Mechanical Vibrations", International conference on Advanced research in Mechanical engineering, 18th November 2012, Pune.
- [39] P.Lakshminarayana, P.Govinda Rao, M.Vijay Sekhar babu, Dr. P.S. Rao, "Reduction of Residual stresses in welded Joints using Mechanical Vibrations and Analysis using Finite Element Method" , International conference on Materials processing and characterization during March 8th-10th, at Gokaraju Rangaraju, Institute of Engineering and Technology, Hyderabad.
- [40] P. Govindarao, Dr. P. Srinivasarao, Dr. A. Gopalakrishna and C V Sriram, Improvement of Tensile Strength of Butt Welded Joints Prepared by Vibratory Welding Process. International Journal of Mechanical Engineering and Technology (IJMET), 4(4), 2013, pp. 53-61.
- [41] G Ramakrishna, P Srinivasa Rao and P Govind Rao. Methods to Improve Mechanical Properties of Welded Joints: View Point, International Journal of Mechanical Engineering and Technology (IJMET), 7(6), 2016, pp. 309-314.